


PLANTING NOTES

1. LANDSCAPE CONTRACTOR SHALL VISIT SITE PRIOR TO SUBMITTING BID TO BECOME COMPLETELY FAMILIAR WITH SITE CONDITIONS.
2. NO PLANTING WILL BE INSTALLED UNTIL ALL GRADING AND CONSTRUCTION HAS BEEN COMPLETED IN THE IMMEDIATE AREA.
3. CONTRACTOR TO VERIFY ALL UTILITIES ON PROPERTY AND TO PROTECT ALL UTILITIES DURING EXCAVATION.
4. IF THERE IS A DISCREPANCY BETWEEN THE NUMBER OF PLANTS SHOWN ON THE PLAN AND THE NUMBER OF PLANTS SHOWN IN THE PLANT LIST, THE NUMBER OF PLANTS SHOWN ON THE LIST WILL TAKE PRECEDENCE.
5. ALL CONTAINER MATERIAL TO BE GROWN IN CONTAINER A MINIMUM OF SIX MONTHS.
6. ALL MATERIAL SHALL COMPLY WITH THE LATEST EDITION OF THE AMERICAN STANDARD FOR NURSERY STOCK, ACCORDING TO THE AMERICAN ASSOCIATION OF NURSERYMEN.
7. CONTRACTOR SHALL REPAIR ALL DAMAGE TO PROPERTY FROM PLANTING OPERATIONS AT NO COST TO THE OWNER.
8. CONTRACTOR SHALL GUARANTEE NEW PLANT MATERIAL THROUGH ONE CALENDAR YEAR FROM TIME OF PROVISIONAL ACCEPTANCE.
9. ALL PROPOSED PLANTS SHALL BE LOCATED CAREFULLY AS SHOWN ON THE PLANS AND THE PLACEMENT SHALL BE APPROVED BY THE LANDSCAPE ARCHITECT BEFORE THE INSTALLATION.
10. ALL DISTURBED AREAS NOT TO BE PAVED OR PLANTED SHALL BE LOAMED AND SEEDED AS SHOWN. SEE SPECIFICATIONS FOR SOIL PREPARATION AND SEED MIX.
11. TWO INCH (2") DEEP, FINELY SHREDDED BARK MULCH WILL BE INSTALLED AROUND ALL TREES AND SHRUBS THAT ARE ISOLATED FROM GROUND COVER AREAS AND GENERAL SHRUB MASSES.
12. ALL PLANT MATERIAL SHALL BE INSPECTED BY THE LANDSCAPE ARCHITECT ON SITE PRIOR TO INSTALLATION. THE LANDSCAPE ARCHITECT WILL TAG ALL TREES AT THE NURSERY AND INSPECT THEM AFTER DELIVERY TO THE SITE. SEE SPECIFICATIONS FOR TAGGING, INSPECTION, AND ACCEPTANCE OF PLANT MATERIAL.
13. LANDSCAPE ARCHITECT SHALL CONFIRM PLANT LIST AND APPROVE SUBSTITUTIONS OF PLANT VARIETIES PRIOR TO ORDERING OF MATERIAL.
14. SOIL MIX: 1/3 PEAT MOSS, 1/3 SCREENED LOAM, 1/3 DEHYDRATED MANURE.

PLANTING LEGEND

- NATIVE PLANTINGS: DECIDUOUS SHRUBS 3 GAL. @ 4" OC**
 MYRICA PENNSYLVANICA (BAYBERRY), CLETHRA ALNIFOLIA (SWEET PEPPERBUSH), VIBURNUM DENTATUM (ARROWWOOD VIBURNUM)
- NATIVE GROUND COVER AND GRASSES: 1 GAL. 4" O.C.**
 VACCINIUM ANGUSTIFOLIUM (LOW BUSH BLUEBERRY), ARCTOSTAPHYLOS UVA-URSI (BEARBERRY), COMPTONIA PEREGRINA (SWEET FERN), PANICUM VIRGATUM (SWITCHGRASS)
- GARDEN AREAS**
 ORNAMENTAL SHRUBS (3-4' B&B, 4" OC)
 HYDRANGEA MACROPHYLLA, HYDRANGEA PANICULATA, CLETHRA ALNIFOLIA, BUDDLEIA DAVIDII, VITEX AGNUS CASTUS, CARYOPTERIS, ILEX GLABRA
- PERENNIALS & GROUND COVER (1 GAL. 2" OC)**
 BAPTISIA, HEMEROCALLIS, GERANIUM, ECHINACEA PURPUREA, LAVANDULA, PEROVSKIA ATRIPPLICIFOLIA, STACHYS BYZANTINA, NEPETA RACEMOSA, ALCHEMILLA MOLLIS, SEDUM 'AUTUMN JOY', PENNISETUM ALEPECUROIDES 'HAMLEN'
- LAWN: FESCUE BLEND SOD**

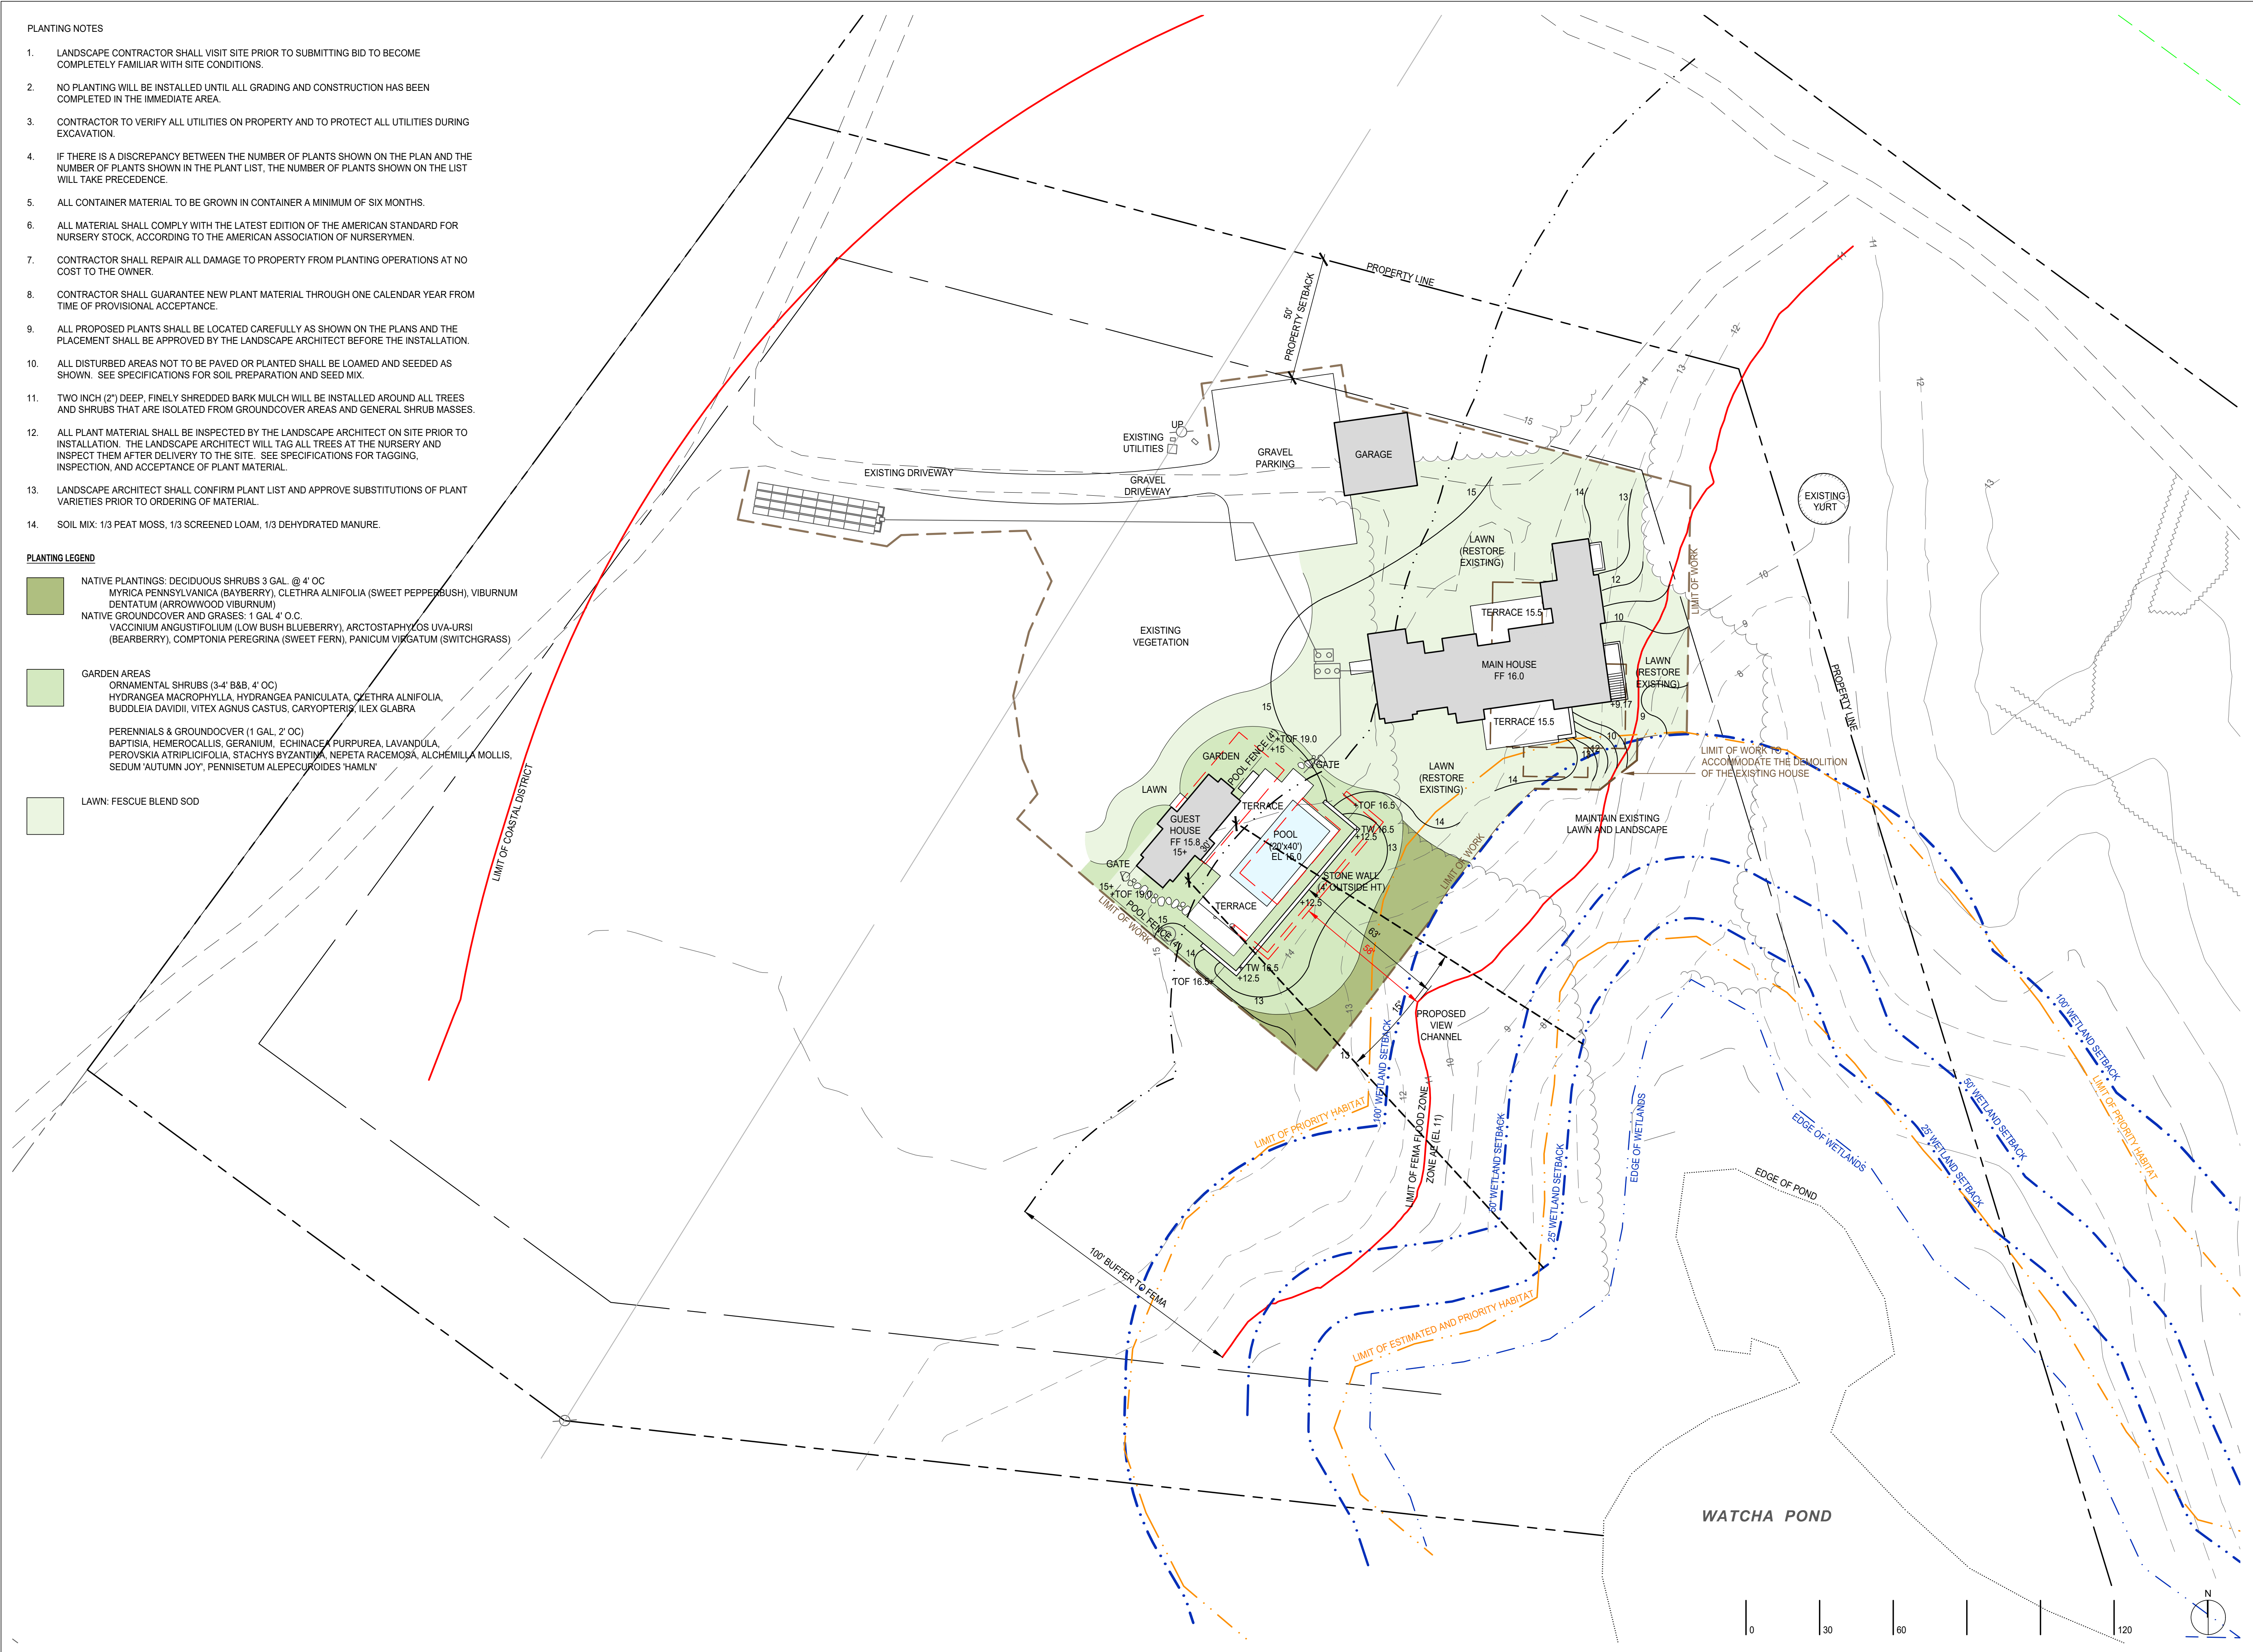

HORIUCHI SOLIEN INC.
 P.O. BOX 914
 200 MAIN STREET
 FALMOUTH MA
 02541

508 540-5320
 FAX 508 540-8651
 info@horiuchisolien.com

HORIUCHI SOLIEN
 LANDSCAPE ARCHITECTS

ARCHITECT
 HUTKER ARCHITECTS
 79 BEACH ROAD
 PO BOX 2347
 VINEYARD HAVEN, MA
 508-693-3344

CIVIL ENGINEER
 VINEYARD LAND SURVEYING & ENGINEERING, INC.
 12 COURNOYER ROAD
 PO BOX 42J
 WEST TISBURY, MA
 508-693-3774

CHENG RESIDENCE
 WATCHA CLUB ROAD
 WEST TISBURY, MA

PROJECT NUMBER: 2058
 DRAWN BY: JC
 CHECKED BY: KMH
 SCALE: 1"=30'
 DATE: 06.19.23

CONCOMM: 09.08.21
 CONCOMM: 10.26.21
 CONCOMM: 12.10.21
 CONCOMM: 06.19.23

LANDSCAPE PLAN

